


Rose and Shrub Kit Assembly Instructions

Congratulations on purchasing one of DripWorks' all-inclusive kits, the easiest way to get a complete drip irrigation system setup to fit your gardening needs. The kit has two parts; the faucet assembly or system start portion that brings the water to your garden and the emitters that distribute that water to your plantings.

System Start

This portion of the kit includes the filter, pressure regulator, hose start fitting, and a roll of mainline tubing.


1. Connect the swivel end of the filter to your faucet
2. Connect the pressure regulator to the filter outlet
3. Connect the female hose start to one end of the mainline tubing roll
4. Connect the female hose start to the pressure regulator
5. Unroll the mainline tubing through the garden areas to be watered
6. Close the mainline tubing with an end fitting
7. Stake down the tubing with hold downs

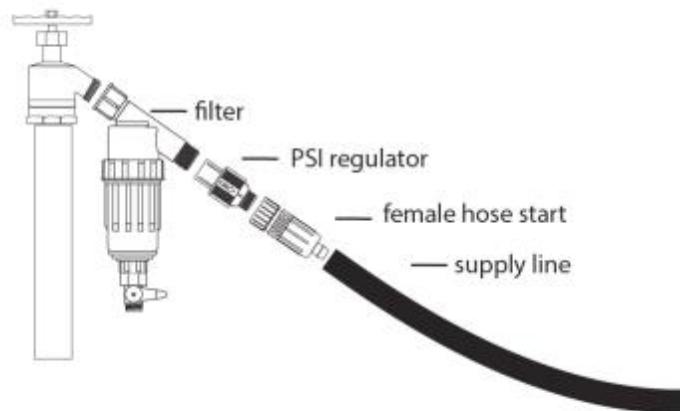

Emitters

The Rose and Shrub Kit uses Shrubblers, pressure compensating emitters mounted on 5" stakes. In addition to the emitters, the kit includes 1/4" transfer barbs, goof plugs, 1/4" elbows, hold downs, a repair coupler, a punch and a roll of 1/4" tubing.

1. Punch a hole at the point where you want to branch off the mainline tubing
2. Insert one side of a transfer barb into the end of the 1/4" tubing
3. Insert the other side of the transfer barb into the punched hole
4. Unroll the 1/4" tubing to where the first planting is located
5. Cut the 1/4" tubing and push the end over the Shrubblers barb
6. Insert the Shrubblers stake into the soil at the base of the planting
7. Repeat this process until all emitters are in place
8. Turn the water on and check to be sure all emitters are working

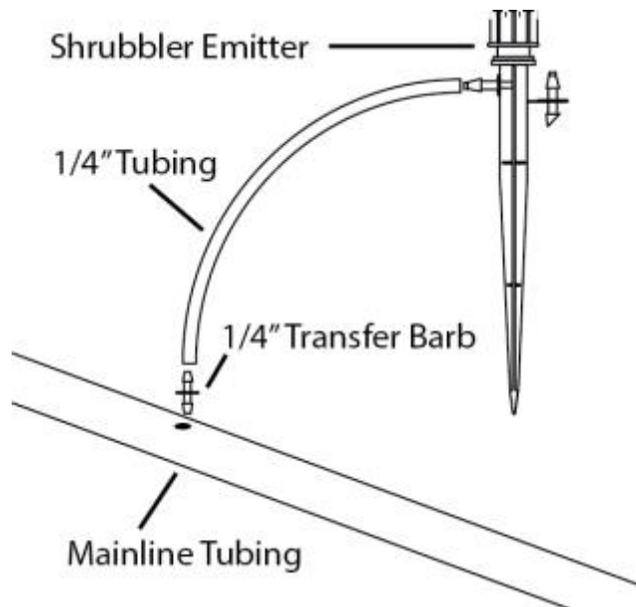

If you have any further questions about our products, or installing your drip system, please contact us at 800-522-3747 or via email at support@dripworks.com or visit our store at DripWorks, 190 Sanhedrin Circle, Willits, CA 95490